



GTTS-3000 VMS

micro SIM Card + backup battery
installation

Rev 1.0 Date: 11-07-2014

Unscrew the 4 imbus screws to remove the cap

Use an Allen key screw driver to remove the 4 (2 on each side) screws that are holding the cap in its place.


Preserve these 4 spacers to reassemble the unit (right image).



Remove the 4 Philips screws


Use a Philips head screw driver to remove the 4 screws that hold the cover in place.

Then lift the cover to the side as shown in the bottom right image and **disconnect the battery** by pulling the 3wire plug from the leads.

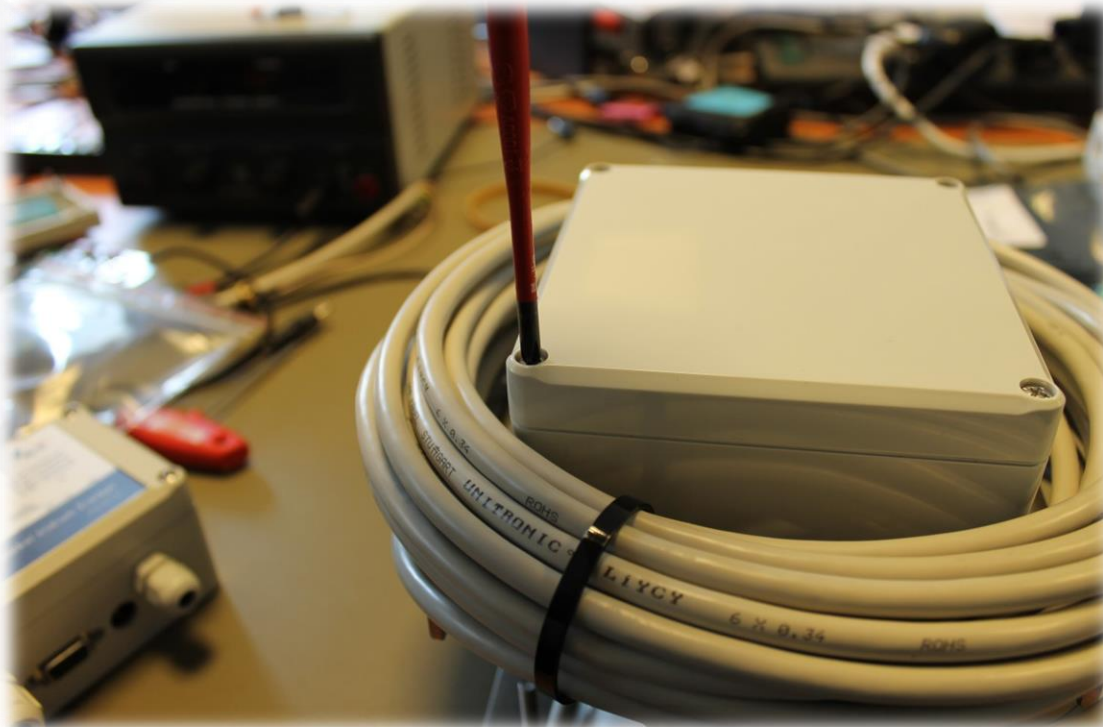


Put the micro SIM Card in its place

Insert the micro SIM Card in its socket as shown in the image below.

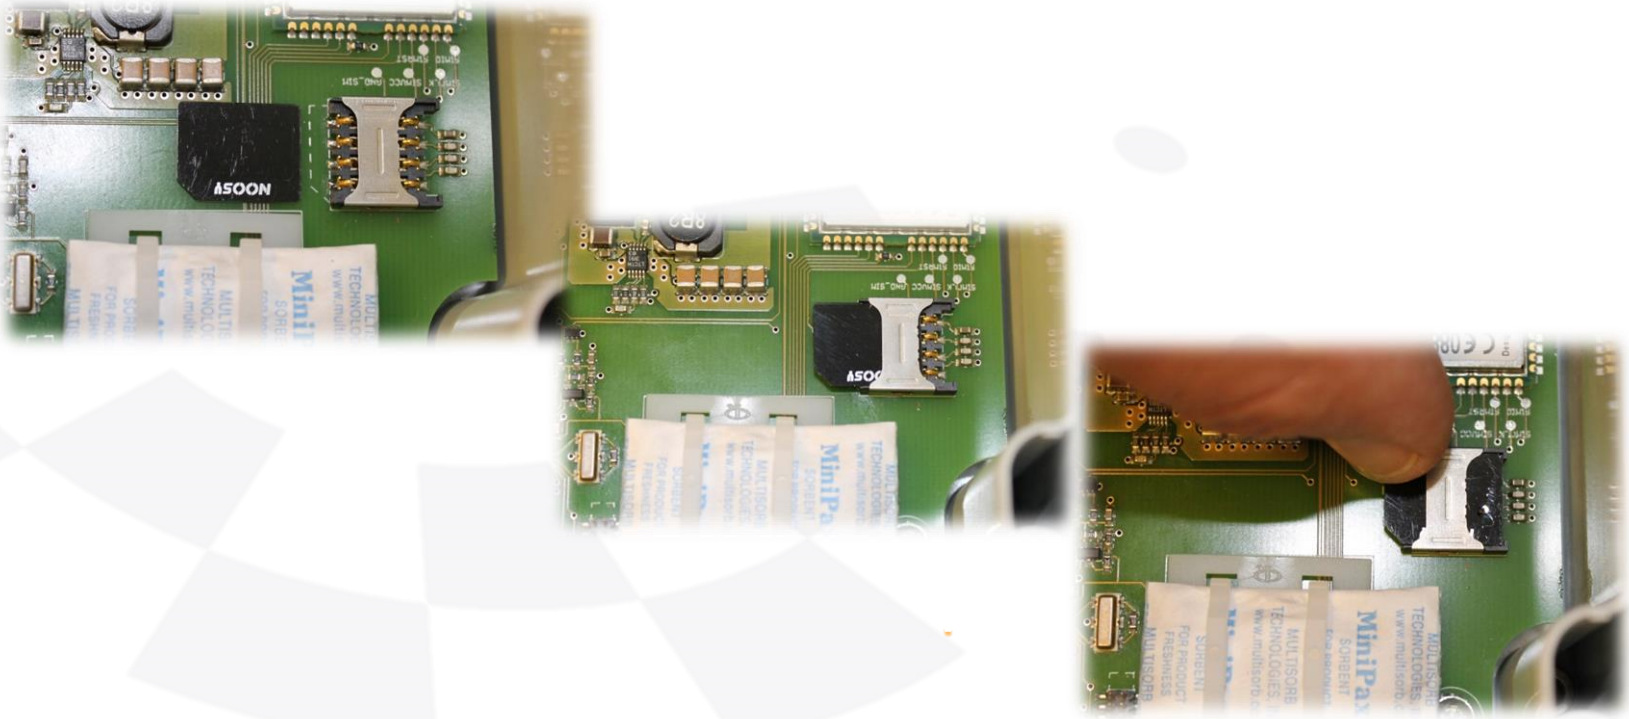


Connect the battery

Connect the battery as shown in the image below.

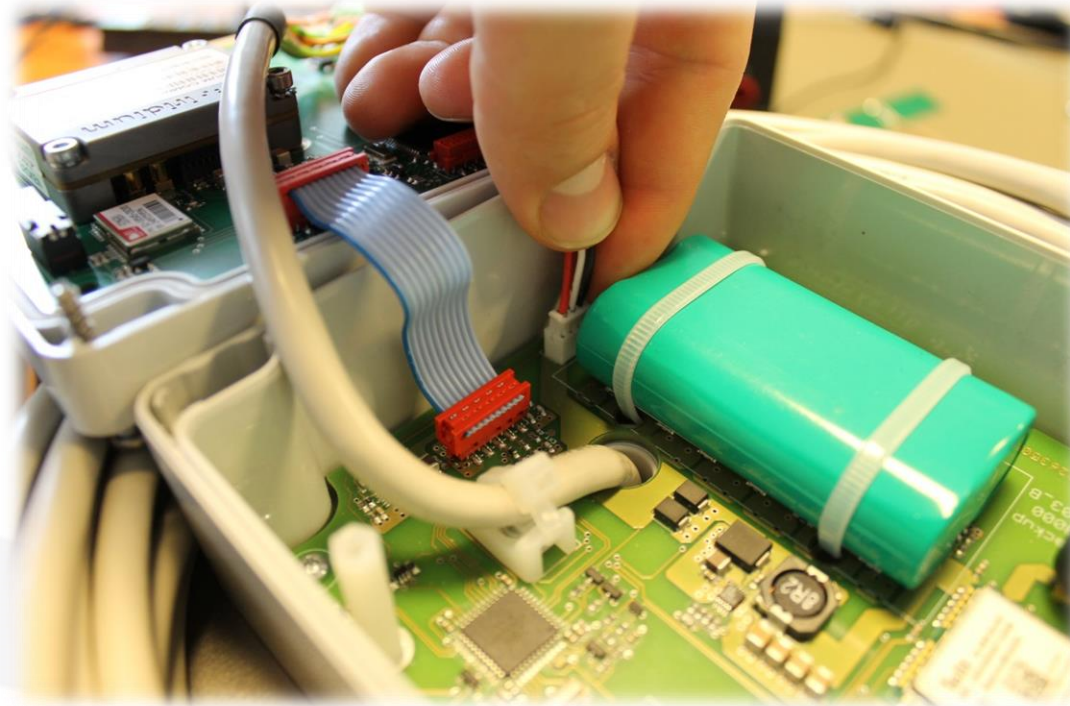

Reassemble the unit

1. Place the cover back on to the bottom half of the box
2. Tighten the 4 screws that hold the cover in place
3. Place the cap on the unit using the 4 Allen key screw. Use the spacer as shown in the bottom right image.

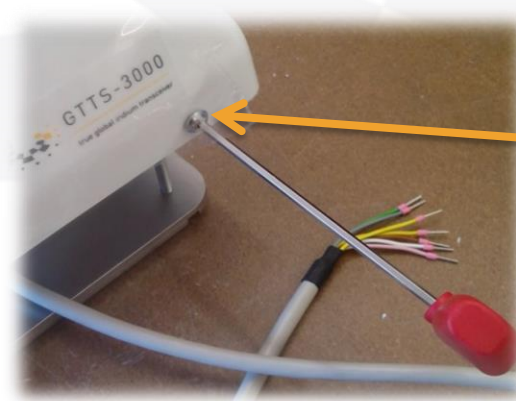

Comments or questions

If you have any comments or questions regarding this manual. Please contact m.vlas@gtt.eu.